



# THERMOCOUPLE CONNECTORS


## Connector Ordering Information




D100 - Standard Plug




D110 - Jab-In Plug



D200 - Miniature Plug



D300 - Standard 3-Pole Plug



D400 - Miniature 3-Pole Plug



D101 - Standard Jack



D111 - Jab-In Jack




D201 - Miniature Jack



D301 - Standard 3-Pole Jack



D401 - Miniature 3-Pole Jack

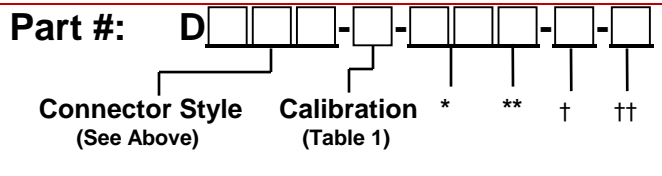

**Table 1**  
Calibration

P/N	Description	*	**	†	††
J	Type 'J'	If a high-temp connector is required, add "HT" after the designated calibration.	If a ceramic connector is required, add "C" after the "HT" designation.	If solid pins are required, add an "S" suffix to the part number.	If gold-plated pins are required, add a "G" suffix to the part number. <sup>1</sup>
K	Type 'K'				
T	Type 'T'				
E	Type 'E'				
N	Type 'N'				
R	Type 'R'				
S	Type 'S'				
C	Type 'C'				
U	Uncompensated	<sup>1</sup> Solid pins required for gold plating.			
X	Special				

Note: Not all configurations will work together. Consult factory with questions.

### Example:

**D100-K-HTC**

Standard male plug. Type 'K'. High-temp ceramic.



DURO-SENSE CORPORATION 869 Sandhill Ave., Carson, CA 90746

Phone: (310) 533-6877 -- Fax: (310) 533-0330 -- E-mail: [sales@duro-sense.com](mailto:sales@duro-sense.com) -- Website: [www.duro-sense.com](http://www.duro-sense.com)