


# MINERAL INSULATED THERMOCOUPLES

## Thermocouple Ordering Information

### Style 'D'

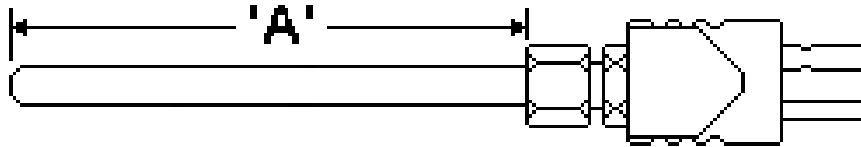

<b>Part #:</b>	<b>MTC-D-</b> <table style="display: inline-table; border: none;"> <tr> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> <td style="border: 1px solid black; width: 20px; height: 20px;"></td> </tr> </table>															<p><b>*SP = Special Limits of Error</b></p> <p><b>If standard limits of error is desired, omit this field.</b></p> <p><b>*HT = Hi-Temp Connector</b></p> <p><b>If standard connector is desired, omit this field.</b></p>
	<table style="display: inline-table; border: none;"> <tr> <td style="border: none;">Sheath Diameter (Table 1)</td> <td style="border: none;">Calibration (Table 2)</td> <td style="border: none;">Sheath Material (Table 3)</td> <td style="border: none;">Junction (Table 4)</td> <td style="border: none;">Length (inches) (Table 3)</td> <td style="border: none;">SP*</td> <td style="border: none;">HT*</td> </tr> </table>	Sheath Diameter (Table 1)	Calibration (Table 2)	Sheath Material (Table 3)	Junction (Table 4)	Length (inches) (Table 3)	SP*	HT*								
Sheath Diameter (Table 1)	Calibration (Table 2)	Sheath Material (Table 3)	Junction (Table 4)	Length (inches) (Table 3)	SP*	HT*										

**NOTE: Dual Element Style is notated as 'DD'**

*NOTE: For any additional modifications to this assembly, add "-MOD" to the end of the part number and provide a physical description of the modification.*

**Table 1**  
**Sheath Diameter**

P/N	Description
010	.010 inches
020	.020 inches
032	.032 inches
040	.040 inches
063	.063 inches
090	.090 inches
125	.125 inches
188	.188 inches
250	.250 inches
313	.313 inches
375	.375 inches

**Table 2**  
**Calibration**

P/N	Description
1	Type 'J'
2	Type 'K'
3	Type 'T'
4	Type 'E'
5	Type 'R'
6	Type 'S'
7	Type 'B'
8	Type 'N'
X	Special

**Table 3**  
**Sheath Material**

P/N	Description
1	Alloy 600
2	304 S.S.
3	316 S.S.
4	310 S.S.
5	321 S.S.
6	446 S.S.
7	MI2300
X	Special

**Table 4**  
**Junction**

P/N	Description
E	Exposed
G	Grounded
U	Ungrounded
EE	Dual Exposed
GG	Dual Grounded
UU	Uncommon-Ungrounded
CU	Common-Ungrounded

**Example:**

**Single Element      MTC-D-06321-U-012-SP-HT**

Style D, .063"  $\phi$ , Type 'K', Alloy 600 sheath, ungrounded junction, 12" active length, special limits of error, hi-temp male connector.

**Dual Element:      MTC-DD-06321-UU-012-SP-HT**

Style D, .063"  $\phi$ , Type 'K', Alloy 600 sheath, uncommon-ungrounded junction, 12" active length, special limits of error, hi-temp male connectors.

